


Bullnose




MODEL	AIRFLOW RANGE m ³ /min (CFM)	(2) HORSEPOWER RANGE HP (Kw)	(1) WEIGHT Kg. (Lbs.)	Dimensions				
				A mm (")	H mm (")	ØC mm (")	ØE mm (")	ØB Outlet Size. mm (")
MO 404	3.5 - 7.0 (124 - 247)	60 - 120 (45 - 90)	1.70 (3.75)	235 (9.25)	153 (6.02)	153 (6.02)	199 (7.83)	102; 82; 76; 70 (4; 3.25; 3; 2.75)
MO 808	7.0 - 11.0 (247 - 388)	120 - 160 (90 - 120)	2.25 (5.00)	240 (9.45)	167 (6.57)	181 (7.13)	243 (9.57)	133; 114; 110; 102; 82 (5.25; 4.5; 4.33; 4; 3.25)
MO 909	11.0 - 15.0 (388 - 530)	160 - 220 (120 - 165)	3.30 (7.30)	272 (10.71)	194 (7.64)	214 (8.43)	276 (10.87)	152; 133; 127; 114; 102 (6; 5.25; 5; 4.5; 4)
GR 103	15.0 - 22.0 (530 - 776)	220 - 300 (165 - 225)	4.15 (9.15)	315 (12.40)	237 (9.33)	255 (10.04)	311 (12.24)	280; 178; 152; 133; 114; 102 (11; 7; 6; 5.25; 4.5; 4)
GR 403	22.0 - 30.0 (776 - 1059)	300 - 400 (225 - 300)	5.35 (11.80)	345 (13.58)	259 (10.20)	310 (12.20)	370 (14.57)	280; 203; 178; 152 (11; 8; 7; 6)
GR 505	30.0 - 40.0 (1059 - 1411)	400 - 550 (298 - 410)	7.50 (16.50)	358 (14.09)	275 (10.83)	375 (14.76)	437 (17.20)	330; 254; 210; 203; 178 (13; 10; 8.26; 8; 7)

(1) In turbocharged or turbo-aftercooled engines the correct model selection is based on the maximum air flow.(2) In normally aspirated engines the model selection by horsepower range is just a recommendation. .
(3) The height "A" varies by diameter ØB. The value given is the tallest team in each family.
(4) The diameters ØB (Outlet Size) are the standard inside diameters. From these the outlet tube can be adapted with reducing sleeves for a variety of smaller outlet choices. These sleeves are provided from Ø 7" to Ø 2.5" generally in 1/4" or 1/2" steps
Oblan s.a. has the right to modify the information contained in this brochure without its previous advise.

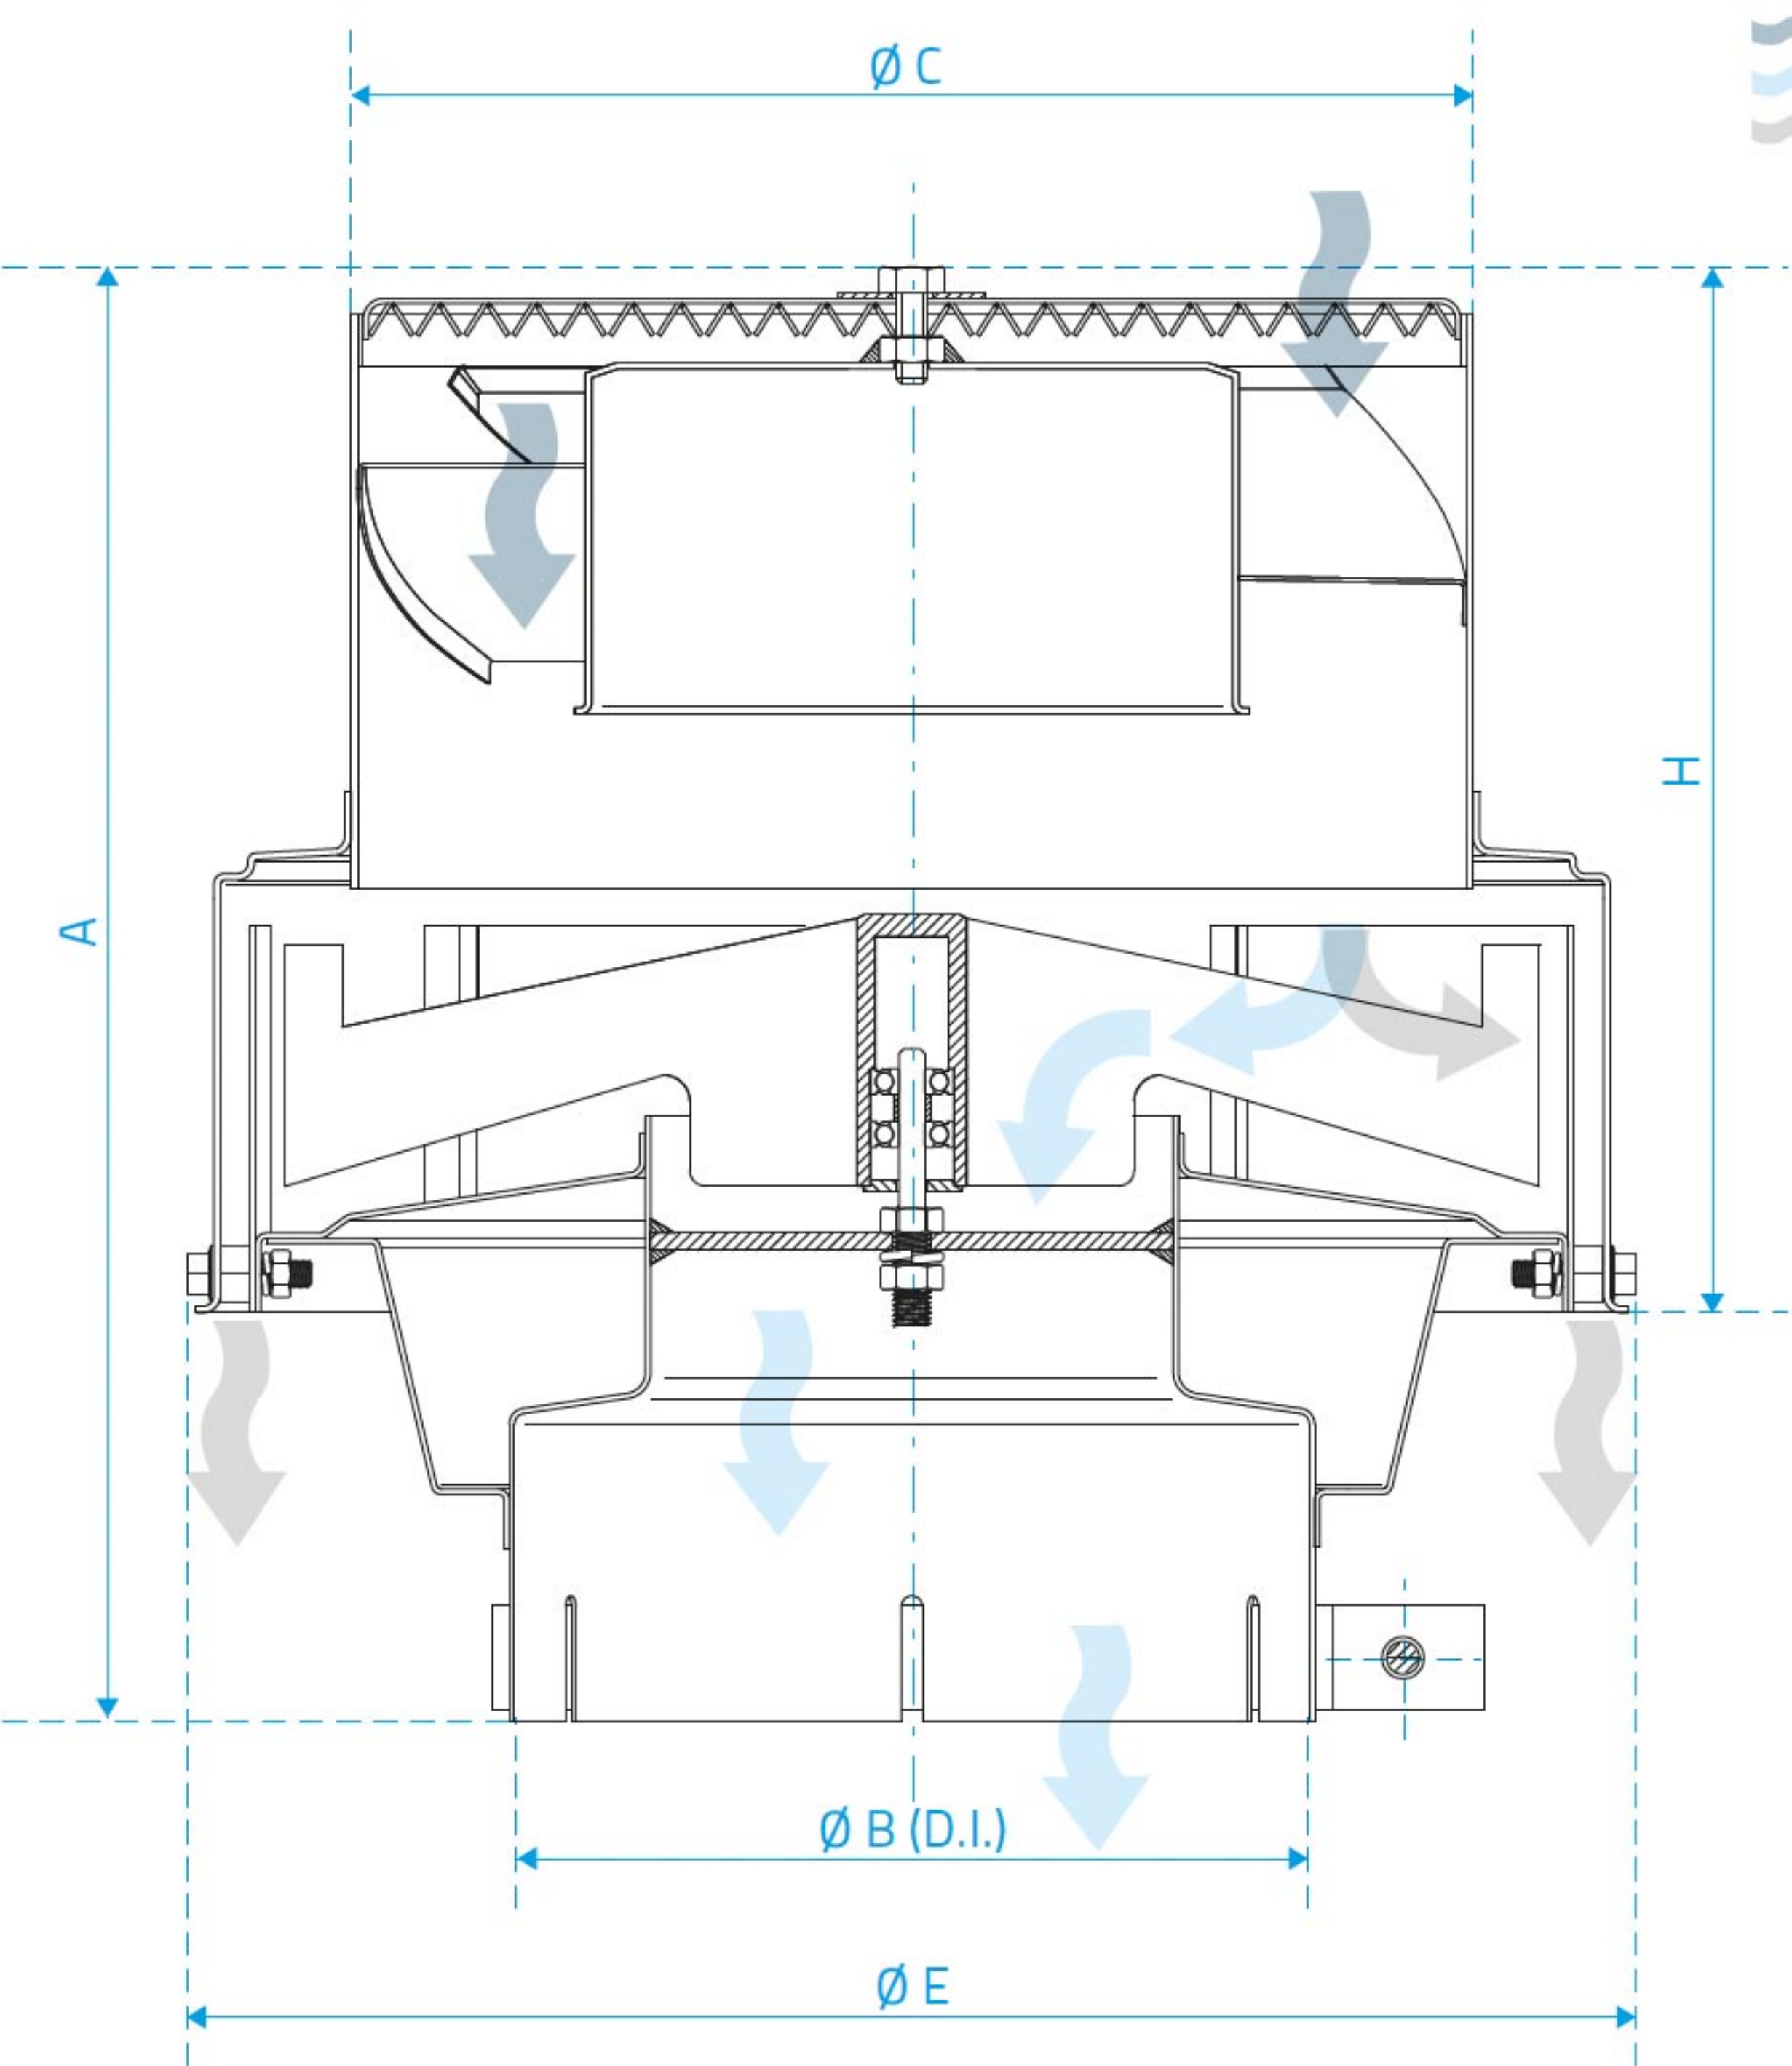

IMPURE AIR
CLEAN AIR
IMPURITIES

Occasionally check that
no foreign material to
block the air intake areas,
or discharge of particles.

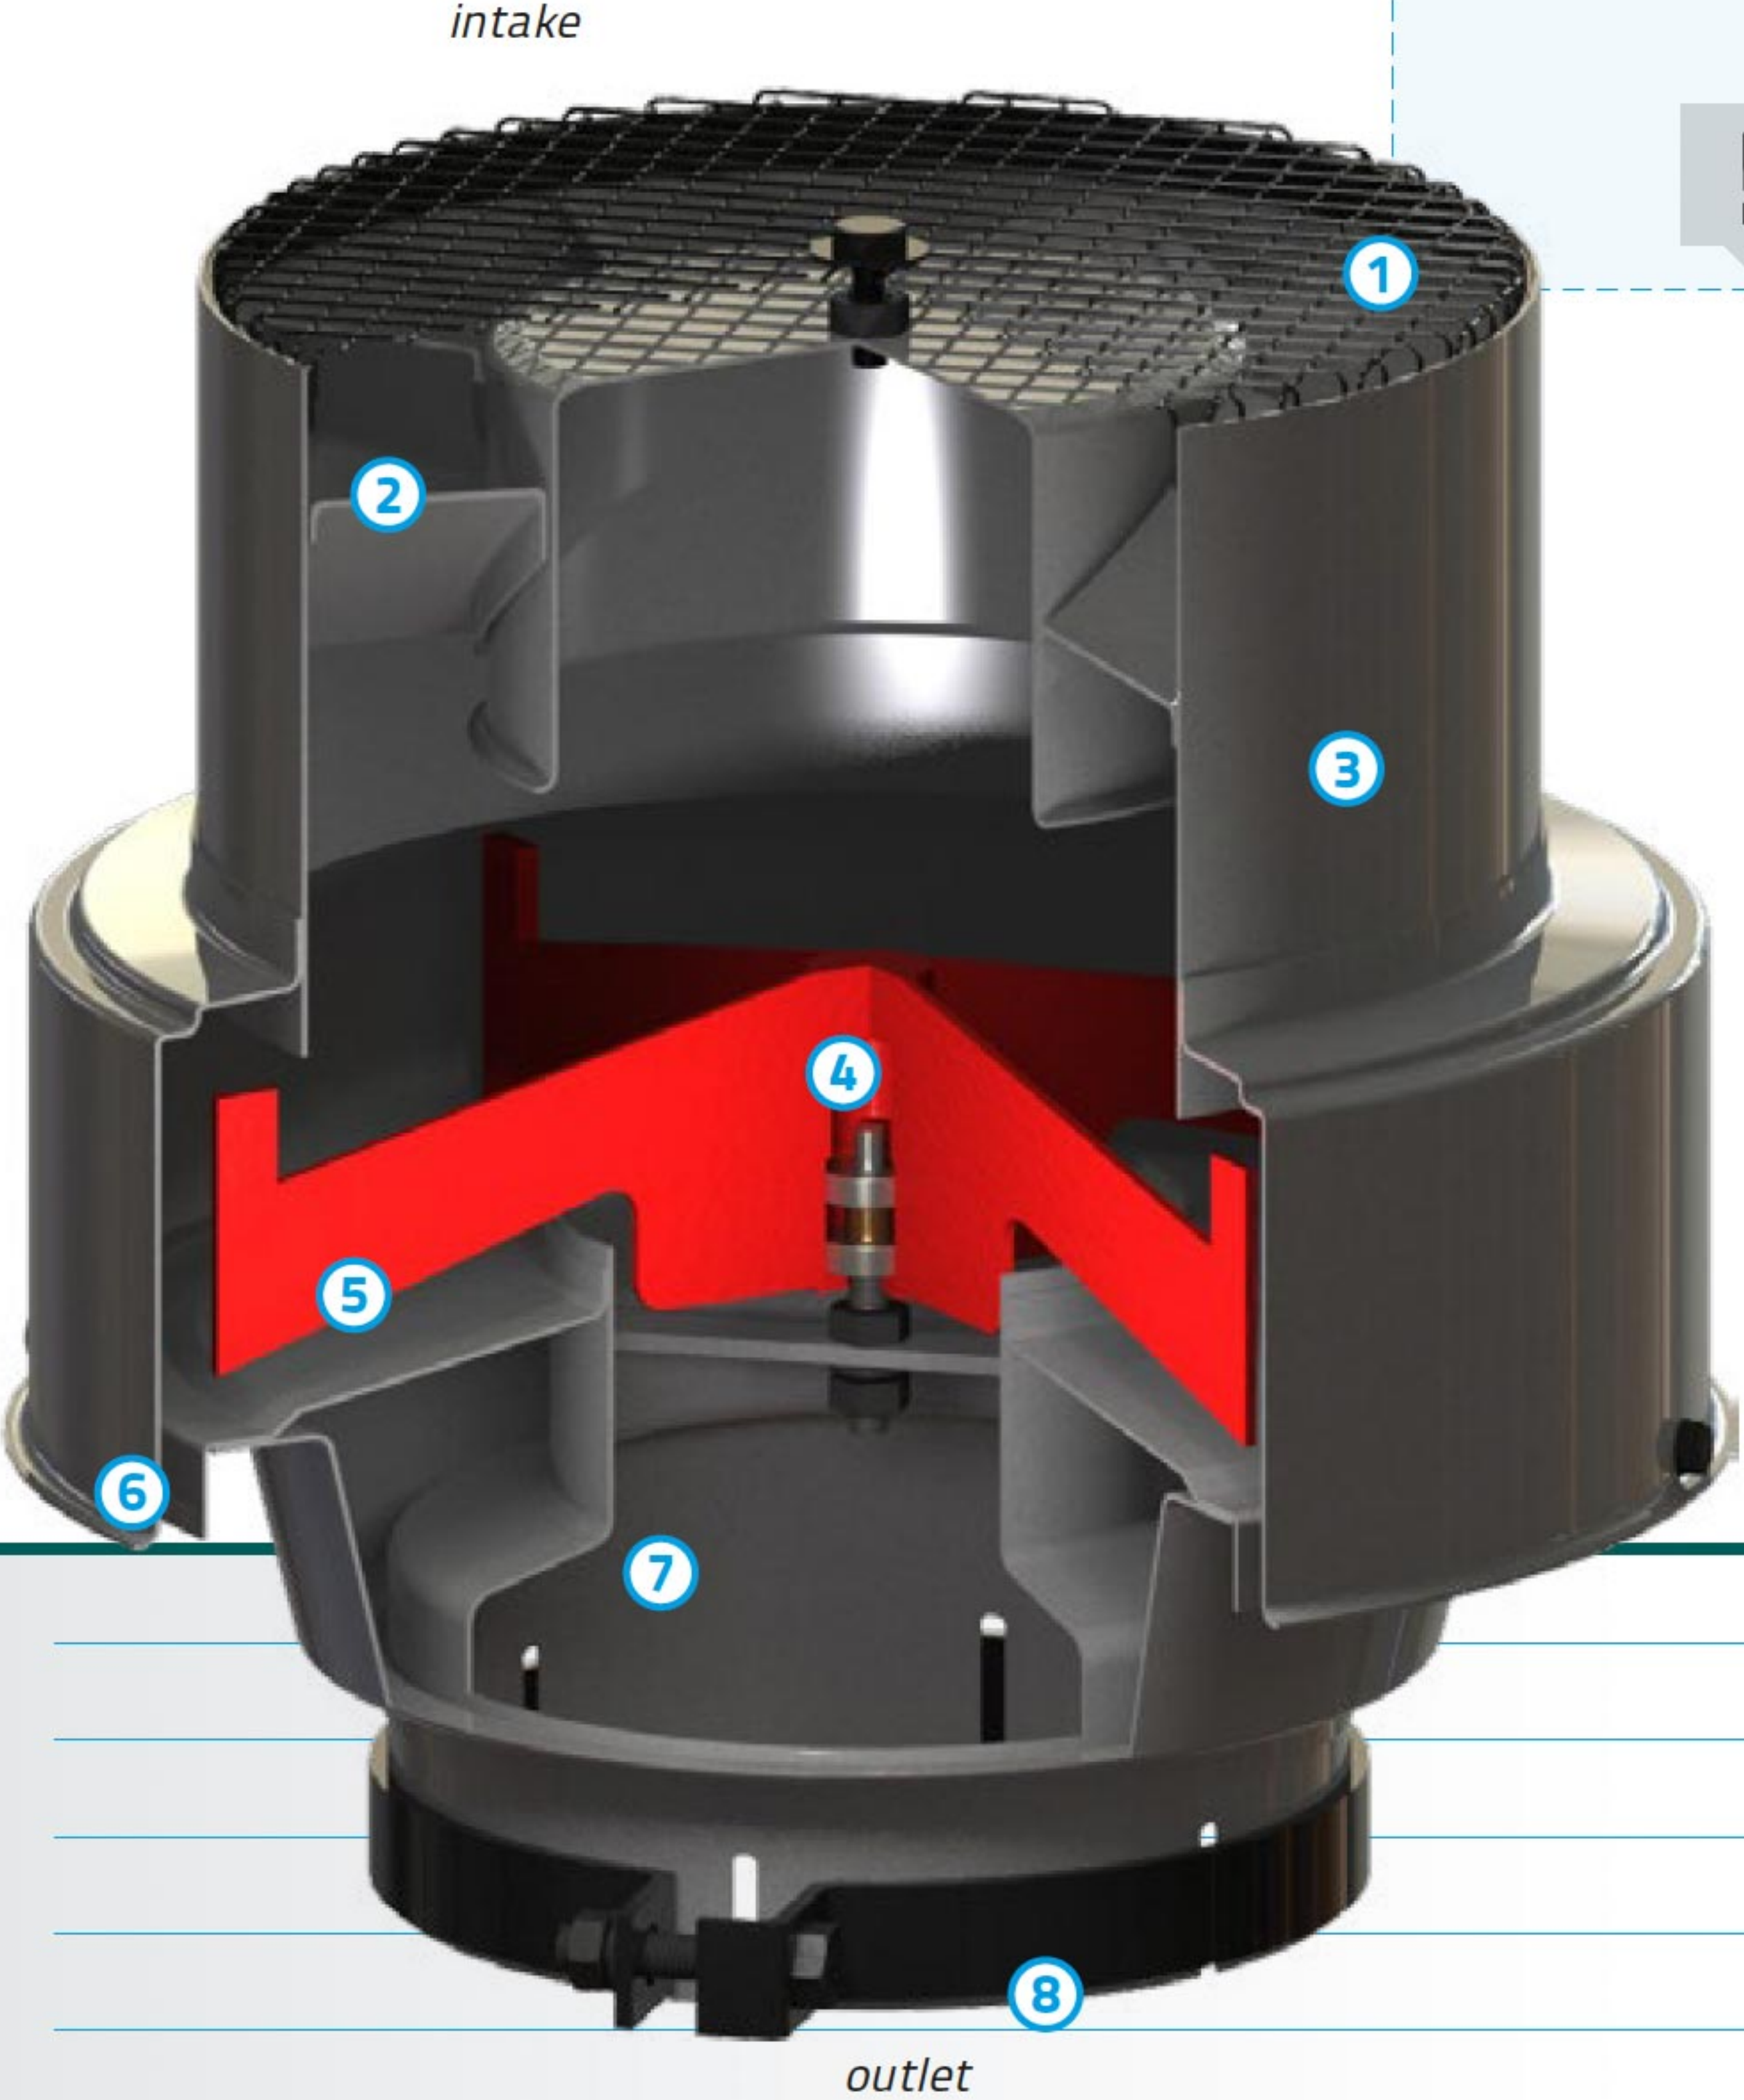

HOW THEY WORK

O'CUATRO Engine Air Precleaners can be installed in interior or exterior applications. If the application is exterior there must be horizontal mounting to avoid rain intrusion. Air enters the system through a pre-screen that removes large debris. It then flows through static vanes causing the air to spin. As the air spins, centrifugal force separates dust, dirt, insects, rain and snow from the air stream. The swirling air drives a high velocity rotor that acts as a blower evacuating contaminants through special discharge ports

- | | |
|------------------------|---------------------------------|
| 1. Screen (air intake) | 6. Discharge Ports |
| 2. Static Vanes | 7. Outlet Pipe (to air cleaner) |
| 3. Hosing | 8. Clamp |
| 4. Two Ball Bearings | |
| 5. Rotor (spinner) | |